
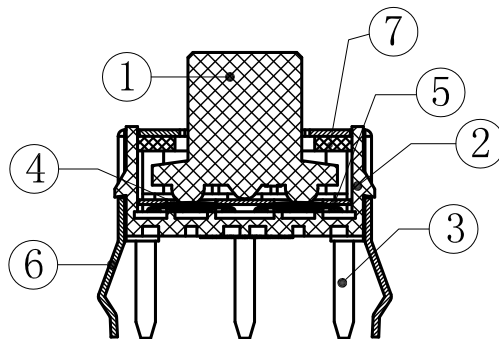



成品检验图面

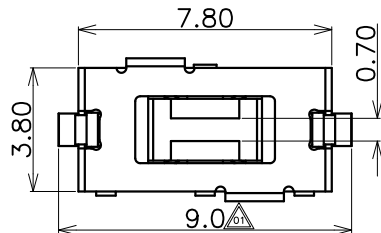

Terminal No.	A	COM	B
Direction			
CCW	●	●	
CW		●	●

Circuit Diagram

产品规格：

- 1. 额定值：DC12V 50mA
- 2. 接触阻抗：200mΩ Max
- 3. 绝缘阻抗：100MΩ Min(DC100V)
- 4. 耐高压：AC250V(50-60Hz)for 1 minute
- 5. 操作力：80±10gf
- 6. 回弹力：30gf(Min)
- 7. 操作角度：7.0° (max)
- 8. 操作寿命：150,000 Cycles(min)
- 9. 此产品必须符合凯华环境有害物质管制标准


NOTE:

：重点管控尺寸，一般1到3个，最多不超过5个，每次进料及生产均需量测

◇：次重点管控尺寸，序列号排列不得超过17个，每次进料及生产时均需量测

△：一般尺寸，个数不限，每次模具变动时才需量测

△版次定义：新开发而未转量产之产品图面版次为A₀、A₁、A₂……
已转量产之产品图面版次为A、B、C……

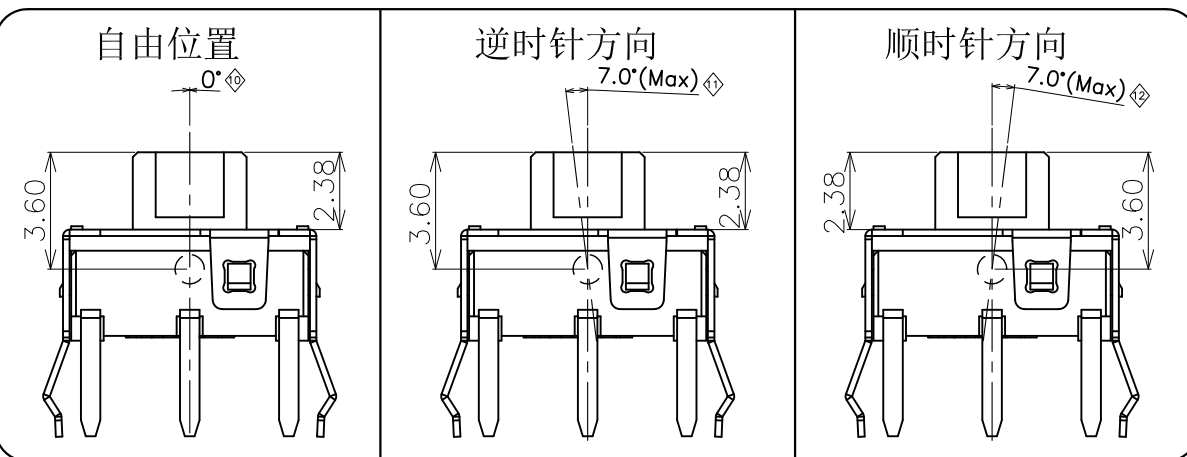

⑦	BSTA7838-04001	盖板	——	1	PA6T	黑色	——
⑥	BWTA7838-06001	外壳	——	1	SUS304-H	镀亮锡	——
⑤	BWTA7838-06003	垫圈	——	1	SUS304-1/2H	——	厚度:0.15
④	BWTA7838-03002	弹片	——	2	SUS301-EH	单面覆银0.5um	——
③	BWTA7838-01001	端子	——	1	H65Y	镀银0.3um	——
②	BZTA7838-02003	基座	——	1	PA10T	黑色	——
①	BSTA7838-05003	导芯	——	1	PA6T	黑色	——
序号	物料料号	零件名称	端子编号	用量	材 料	镀层/颜色	备注

承 认		日期		 Kailh	东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD				
设 计		賴由雄			2017/11/02		名 称	TA7838两向摇摆轻触开关	
审 核						料 号	CTA783805D12		
核 准						单 位: mm	比例:1:1		视角 
未注尺寸公差	30<L		±0.30		角 度	单位: mm	比例:1:1	视角 	
	10<L≤30		±0.20						
	5<L≤10		±0.15						
	L≤5		±0.10						
				±2°		图 号	KHA-TA7838-001		页次 1 OF 1

ECN-1402-02	D	2014. 2. 11	为改善开关因铁壳翘曲导致导芯晃动问题，增加部件⑦压住导芯，同时导芯材质由PA10T变更为PA6T	石习军		
ECN-1112-07	C	2011. 10. 24	1. 为保证产品更好的耐热性能将产品的基座和摇柄材料由LCP变更为PA10T 2. 为提高产品的寿命和手感落差感，将弹片由90gf变更为80gf 3. 配合ERP系统，产品的料号由TA783805D10变更为CTA783805D12	石习军		
工程变更单号	版次	日期	说明	修 改	审 核	核 准




凱華電子
KAIHUA EEELETRONICS

Document Number:

KH-PS1611-03

产品规格书

Product Specification

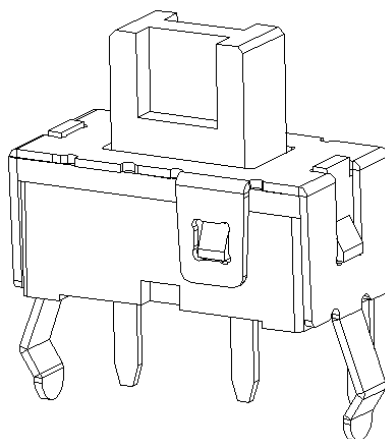

P/N: _____

CTA783805D12

Title :

2 Way MT Switch

Rev.	ECN	Release and Revision Description:	PreparedBy/Date:	Checked By/Date:	Approved By/Date:
A	-----	New releasing 初版发行	賴由雄 2017/11/02	易 平 2017/11/02	王 鋒 2017/11/02



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:	DOC. No.:	Rev.:	Page:
CTA783805D12	KH-PS1611-03	A	2/10

Content

目录

1. Scope/范围:	3
2. Product Application/产品应用：	3
3. Technology Parameters/技术参数	3
4. Ratings/额定性能要求	3
5. Profile Dimensions /外形尺寸	3
6. Electrical Performance/电气性能	4
7. Mechanical Performance/机械性能	5
8. Environmental Performance/环境性能	7
9. Recommended PCB Layout/推荐的 PCB 安装焊盘规格	9
10. Packaging 包装：	9
11. Precaution/注意事项	10

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:	DOC. No.:	Rev.:	Page:
CTA783805D12	KH-PS1611-03	A	3/10

1. Scope/范围:

This Product Specification covers the requirement of 2 Way MT Switch on product performance, test methods and quality assurance provisions.

本规格书内容涵盖两向摇摆开关产品的要求，包括性能指标、测试方法及质量保证方面等。

2. Product Application/产品应用:

The Switch is applied in all types of Computer. Please let us know before using any of the products in the application not described above.

该开关产品适用于所有类型的家用电器，如果用于本文中未提及的领域请在使用前告知。


3. Technology Parameters/技术参数

Ambient Humidity 工作湿度:	45~85% R.H.;
Operating Temperature Range 使用温度范围:	-10℃~+70℃;
Storage Temperature Range 保存温度范围:	-20℃~+70℃;
Normal Condition:	
Ambient temperature 环境温度:	20±5℃
Relative humidity 相对湿度:	65%±5% R.H.;
Air pressure 气压:	86~101KPa;
Contact Resistance 接触阻抗:	200 mΩ Max;
Operation Force 操作力:	80±10gf;
Releasing Force 回弹力:	30gf (Min) .
Operating angle(Lever operation) 操作角度 (杠杆操作):	7.0° (max)
Solder Ability 可焊性:	245±5℃,3±0.5s;
Withstand Soldering Temperature 耐焊接热:	260±5℃,3±0.5s;

4. Ratings/额定性能要求

Rating 额定负荷:	DC12V / 50mA;
Insulation Resistance 绝缘电阻:	≥100MΩ/DC 100V;
Withstand Voltage 耐电压:	250V AC 1 Minute;
Mechanical Life 机械寿命:	150,000 Cycles (min).

5. Profile Dimensions /外形尺寸

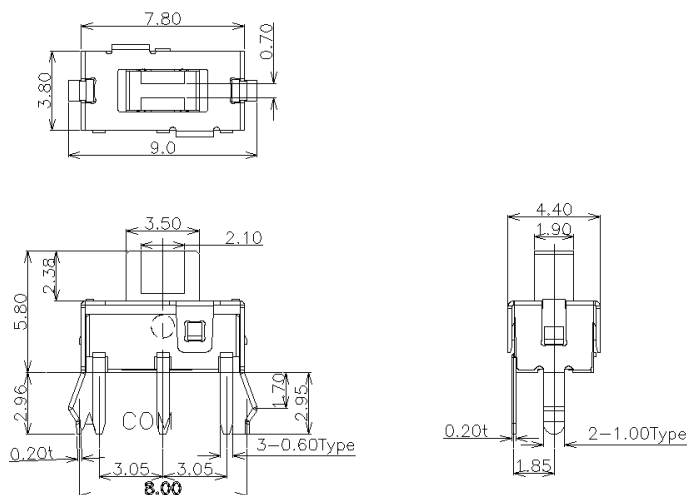

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:	DOC. No.:	Rev.:	Page:
CTA783805D12	KH-PS1611-03	A	4/10

6. Electrical Performance/电气性能

Item 项目	Description 项目描述	Test Condition 测试条件	Requirement 规格要求
6.1	Contact Resistance 接触电阻	Static load: (Operation force)x2, which is applied on the center of Switch stem. 静态负载: 动作力的 2 倍, 施加在手柄中心. Measurement tool: Contact resistance Meter. 测量工具: 微电流接触电阻计(1KHz, 20mV,5~50mA) 在低电流 (≤100mA) 条件下测试. Measured at low current (100mA or less).	200mΩ Max 200mΩ 以下
6.2	Insulation Resistance 绝缘电阻	Apply a Voltage of DC 100 V for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body. 输入 100V DC 电压 1 分钟, 按如下接触方法测试: (1) 端子与端子之间. (2) 端子与外壳之间.	100MΩ Min 100 兆欧以上
6.3	Dielectric withstanding voltage 耐电压	Apply a Voltage of AC 250 V (50~60Hz) for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body. 输入 250V AC 电压 1 分钟, 按如下接触方法测试: (1) 端子与端子之间. (2) 端子与外壳之间.	No evidence of breakdown 无瞬断、击穿等破坏.
6.4	Bouncing 触点抖动	Operation speed: 1~2 times/s 操作速度: 每秒 1~2 次 Slightly push the center of stem by 1~2 times/s, to test the bounce at "ON" and "OFF" 以每秒 1~2 次的速度, 轻轻在手柄中心加力, 在"导通"与"瞬断"间测试. Oscillo scope 示波器 Switch Bouncing Test Circuit 抖动测定回路.	Before Life cycle: On:5ms MAX,5 毫秒以下 Off: 5ms MAX,5 毫秒以下 After Life cycle: On:10ms MAX,10 毫秒以下 Off: 10ms MAX,10 毫秒以下

" Confidential "

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:

CTA783805D12

DOC. No.:

KH-PS1611-03


Rev.:

A

Page:

5/10

触点抖动用图：

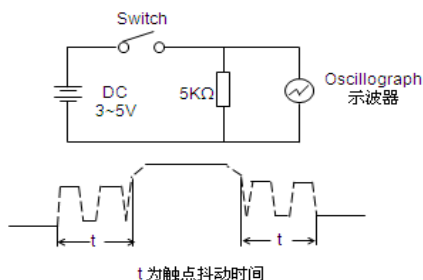

7. Mechanical Performance/机械性能

Item 项目	Description 项目描述	Test Condition 测试条件	Requirement 规格要求
7.1	Operation force 操作力	Operate the keystone of the switch and then increase press strength gradually, Measured maximum operation force while the travel of the switch is full. 逐渐施力操作开关按键，测量开关到达全部工作行程时所需的最大操作力度。	$80 \pm 10\text{gf}$
7.2	Operation angle 操作角度	Push the handle along the switch Axis, measure the angle when the switch arrives at the position of operation. 沿开关轴的方向推开关的推柄，测量开关到达操作位置时推柄摆动的角度。	Angle 7.0° (Max)

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:

CTA783805D12

DOC. No.:

KH-PS1611-03

Rev.:

A

Page:


6/10

7.3

Static Strength
静止强度

A static load of 0.2 Kgf shall be applied in the direction of button operation for a period of 60 seconds.

在手柄动作方向施加 0.2kgf 的静负荷 60 秒, 然后测试参数.

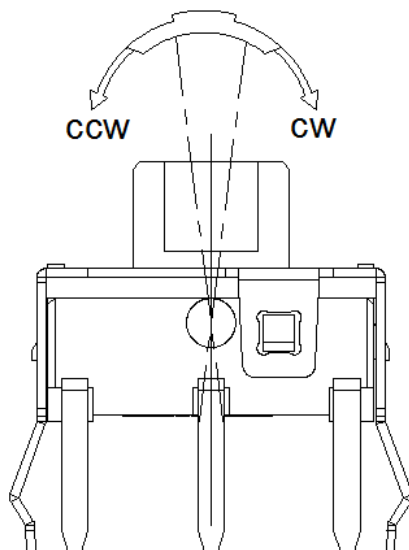

Nodamage(ElectricalAnd
mechanical)
电气和机械性能正常.

7.4

Stem Pull
Strength
手柄拉拔强度

Break by a pull force applied opposite to the direction of stem operation.

在推柄动作方向反向垂直施加拉力, 使其破坏的程度.

500gf Min

7.5


Shock
机械冲击

Measured by according to the below condition:

(1) Acceleration: 80g 加速度

(2) Cycles of test:3 cycles each in 6 directions, for a total of 18 cycles.

试验次数: 每个方向 3 次, 6 个方向共 18 次.

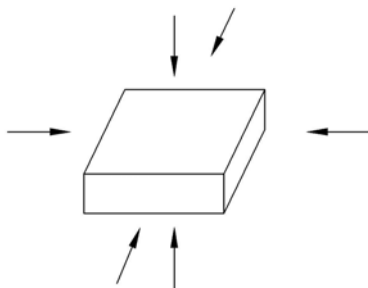

Shall meet No.6, 7.1, 7.2.
满足 6, 7.1, 7.2 要求.

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:	DOC. No.:	Rev.:	Page:
CTA783805D12	KH-PS1611-03	A	7/10

7.6

Life Test
寿命测试

Switch shall be operated continuously at about 20-30cycles/in without load

开关在寿命设备上以约 20-30 次/分的速度连续被操作。

Life test:150,000cycles
After test:
Insulation resistance:
100M Ω Min
Operating force: Change should be within $\pm 50\%$ of specified value.
No abnormalities shall be recognized in appearance and construction.
寿命: 150,000 次
实验后:
绝缘电阻: 100M Ω Min
操作力: 变化在 $\pm 50\%$ 内
开关外观及结构无损坏


8.Environmental Performance/环境性能

Item 项目	Description 项目描述	Test Condition 测试条件		Requirement 规格要求
8.1	Cold test 耐寒性	(1) Temperature : $-20\pm 2^{\circ}\text{C}$ 温度: $-20\pm 2^{\circ}\text{C}$ (2) Duration of test: 96h 持续时间: 96 小时 (3) Take off a drop water 去掉水珠 (4) Standard conditions after test : 1h 试验后的放置条件: 1 小时		Contact resistance: 200m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2 接触电阻 200m Ω 以下 满足: No. 6.2 to 6.4 No. 7.1 to 7.2
8.2	Heat test 耐热性	(1) Temperature : $80\pm 2^{\circ}\text{C}$ 温度: $80\pm 2^{\circ}\text{C}$ (2) Duration of test: 96h 持续时间: 96 小时 (3) Take off a drop water 去掉水珠 (4) Standard conditions after test : 1h 试验后的放置条件: 1 小时		Contact resistance: 200m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2 接触电阻 200m Ω 以下 满足: No. 6.2 to 6.4 No. 7.1 to 7.2
8.3	Temperature cycle 温度循环	(1) Test cycles: 5 cycles 试验周期: 5 个周期 (2) Standard condition after test:1h 试验后的放置条件: 1 小时		Contact resistance: 200m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2 接触电阻 200m Ω 以下 满足: No. 6.2 to 6.4 No. 7.1 to 7.2
			Temperature 温度	
			Duration of test 持续时间	
		1 cycle 一次循环	20 $\pm 5^{\circ}\text{C}$	
			-20 $\pm 2^{\circ}\text{C}$	
			20 $\pm 5^{\circ}\text{C}$	
			70 $\pm 5^{\circ}\text{C}$	

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD

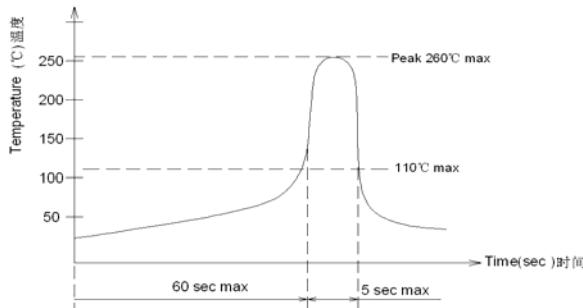

8.4	Soldering heat test 耐焊接热	Soldering area: T/2 of PWB thickness. (PWB: T=1.6mm) 焊接面积: 印刷基板的 1/2 厚度处 Soldering temperature: $260 \pm 5^{\circ}\text{C}$ Soldering time: $3 \pm 0.5\text{s}$ 焊接温度: $260 \pm 5^{\circ}\text{C}$ 焊接时间: 3 ± 0.5 秒	Appearance: No abnormality. 外观无异常
8.5	Solderability 可焊性	1. Hand soldering 手工焊接: Please practice according to below condition: (1) Soldering Temperature : $350 \pm 5^{\circ}\text{C}$ 焊接温度: $350 \pm 5^{\circ}\text{C}$ (2) Continual soldering time: $3 \pm 0.5\text{s}$ 连续焊接时间: 3 ± 0.5 秒 (1) Capacity of soldering iron: $\leq 20\text{w}$ 电烙铁功率: 20 瓦以下 2. Automatic PIP soldering 自动焊接: For the product of T/H, according to below condition: 	At least 95% of surface area of immersed portion shall be covered by solder. 侵焊面积大于 95% 以上.
8.6	Humidity test 耐湿性	(1) Temperature : $60 \pm 2^{\circ}\text{C}$ 温度: $60 \pm 2^{\circ}\text{C}$ (2) relative humidity: 90~95% R.H. 相对湿度: 90~95% R.H. (3) Duration of test: 96h 持续时间: 96 小时 (4) Take off a drop water 去掉水珠 (5) Standard conditions after test: 1h 试验后的放置条件: 1 小时	Contact resistance: $200\text{m}\Omega$ Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2 接触电阻 $200\text{m}\Omega$ 以下 满足: No. 6.2 to 6.4 No. 7.1 to 7.2



凱華電子
KAIHUA EEELETRONICS

Product Specification


P/N:	DOC. No.:	Rev.:	Page:
CTA783805D12	KH-PS1611-03	A	9/10

8.7	Salt Spray 盐雾测试	Apply the following environment to test: 根据下列条件进行测试: (1) Temperature : $35 \pm 5^{\circ}\text{C}$ 温度: $35 \pm 5^{\circ}\text{C}$; (2) Salt water density: $5 \pm 1\%$ 盐水浓度: $5 \pm 1\%$; (3) Duration: 24 hours 持续时间: 24 小时; (4) After test, the salt deposit shall be removed by running water. 实验后将盐沉积物用水冲掉	Appearance: No corrosion spot, no crack, no base plate naked. 外观: 无腐蚀点, 无裂纹, 无裸露基材. Contact Resistance: $200\text{ m}\Omega$ Max 接触电阻: 200 毫欧以下
8.8	Withstand K ₂ S 硫化测试	Apply the following environment to test: 根据下列条件进行测试 (1) Temperature: $35 \pm 5^{\circ}\text{C}$ 温度: $35 \pm 5^{\circ}\text{C}$ (2) K ₂ S Density: 2%; 硫化钾浓度: 2% (3) Duration: 2 minute. 持续时间: 2 分钟	Appearance: No corrosion spot, no crack, no base plate naked. 外观: 无腐蚀点, 无裂纹, 无裸露基材. Contact Resistance: $200\text{ m}\Omega$ Max 接触电阻: 200 毫欧以下

9. Recommended PCB Layout 推荐的 PCB 安装焊盘规格

(Top View)

(Single face board T=1.6mm)

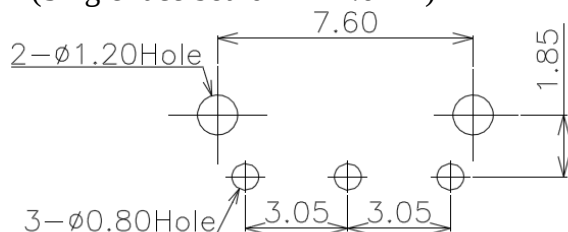



Recommended PCB Layout

(Pattern Side), Tolerance: $\pm 0.05\text{mm}$

10. Packaging 包装

Packaging type: PE Bag, 1000Pcs/Bag, 20000Pcs/ Carton.

包装方式: PE 袋, 1000Pcs/袋. 20000Pcs/箱

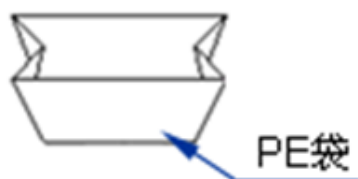

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



11. Precaution 注意事项

11.1 Immersion Soldering condition 浸焊条件

ITEM 项目	CONDITION 条件
Preheat temperature 预热温度	110°C Max (Ambient temperature of soldering surface of P.W.B) 110°C 以下(印刷基板焊锡面周围的温度)
Preheat time 预热时间	60s, Max 60 秒以内
Area of flux 助焊剂面积	1/2 Max of PWB Thickness 印刷基板厚度的 1/2 以内
Temperature of solder 焊锡温度	260±5°C 260±5°C
Time of immersion 浸焊时间	Within 5s 5 秒以内
Number of soldering 焊接次数	2time Max (But should down heat of the first soldering) 2 次以内
Printed wiring board 印刷基板	Single side copper-clad laminates 单面铜箔

(1) After switches were soldered, please be careful not to clean switches with solvent

开关浸焊后,注意不要用溶剂清洗.

(2) Under the condition of using soldering iron, soldering temperature shall be 350°C max within 3 sec.

在使用烙铁的情况下,焊锡温度应在350°C以下,焊接时间3秒以内.

11.2 Notes 注意点

(1) Please be cautious not to give excessive static load or shock to switches.

注意不要施加超负荷的压力或晃动开关.

(2) Please be careful not to stack up P. W. B. after switches were soldered.

开关焊接以后,印刷基板注意不要叠放.

(3) Preservation under high temperature and high humidity or corrosive gas should be avoided

Especially. When you need to preserve for a long period, do not open the carton.

保管时尤其应注意避开高湿高温和有腐蚀性气体的环境.如需长时间保存,请不要打开包装箱.

(4) Products meet the ROHS & REACH environmental management substances control standards

产品满足 **ROHS & REACH** 环境管理物质管制标准