
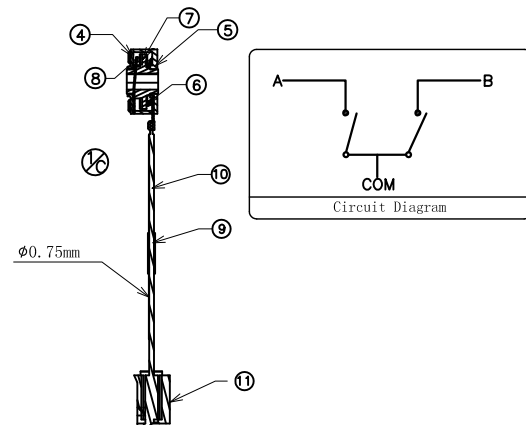
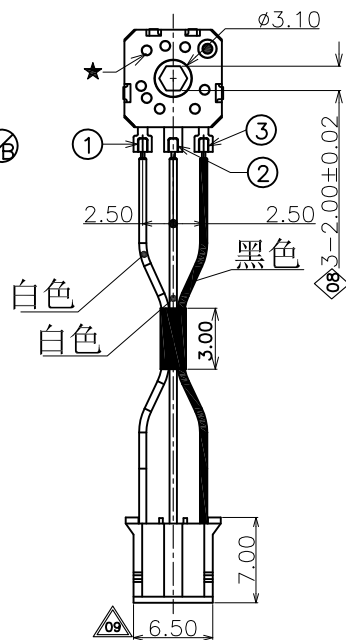
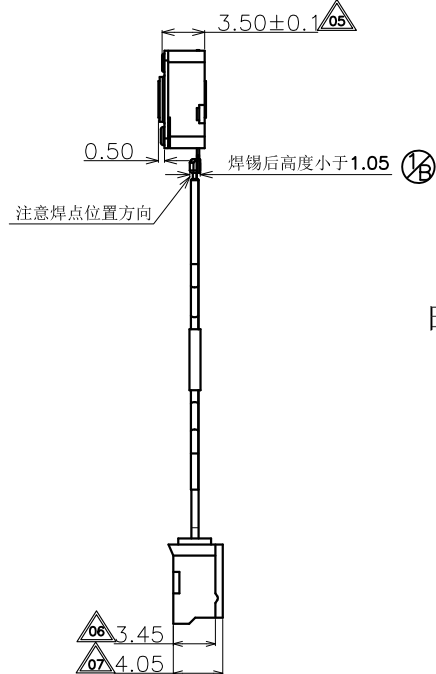


成品检验图面

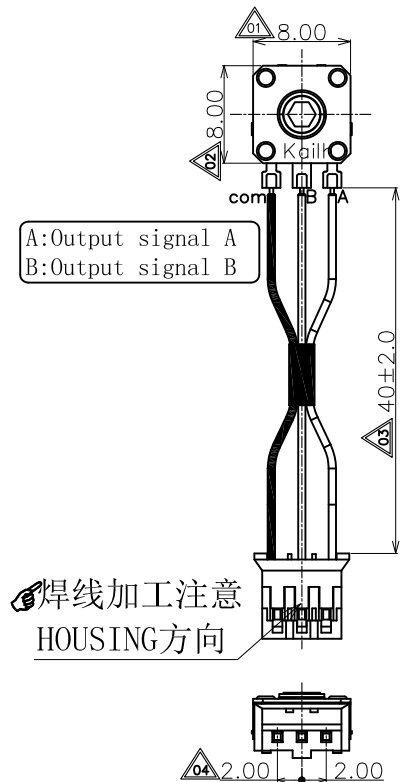

■ 产品规格

- 1. 额定电压: D.C. 5V
- 2. 最大额定电流 (阻抗负载) 各导线 :1mA
- 3. 分析能力: 每12个脉冲/360°
- 4. 接触电阻: 10 Ω (最大)
- 5. 绝缘阻抗: 50M Ω (最小) DC50V
- 6. 耐压性: AC50V (50~60Hz) 持续1分钟
- 7. 卡点扭力矩: 10~25gf.cm
- 8. 寿命测试 :200,000 Cycles (最小)

备注:

◇：表示重点管控尺寸，一般为功能尺寸，首检及巡检时需量测。

△: 表示次重点管控尺寸, 一般为装配尺寸, 首检时需量测。

1) 重点及次重点管控尺寸中的序号不可重复, 需依次往后增加。


在变更或其它状况下, 尺寸消失或不要求管控时, 原序号不可再用。有其它尺

2) 板次定义: 新开发而未转量产之产品图面板次为A1、A2、A3

2) 版次定义:新开发而未转量产之产品图面版次为A、B、C、...

Shaft hole shape and dimension

Shaft hole position
will be at random

(Tolerance: ± 0.1)

■ 检验项目和检验重点:

- 1. 焊接后焊接处承受的抗拉力为500gf(客户标准), 进料检验抗拉力为2kg(min) 供应商;
- 2. 编码器的线材焊接处需承受10次以上的自然摇摆测试而不能断裂
- 3. 线材焊接处的锡点不能超出编码器的端子脚;
- 4. 焊接后编码器基座不可有烫伤现象;
- 5. 焊接后焊接处线材外皮不可退皮、不可有露铜线现象;
- 6. 焊接后编码器表面不能有助焊剂和锡膏等杂物。

备注:

1. 底座背面的压针孔★是根据产品模具成型要求而定的，其规格的大小与数量的多少对产品结构、功能及使用无任何影响；
2. 未标注尺寸公差为 ± 0.05 ；
3. 连接使用的包线为 $\phi 0.75\text{mm}$ 外径的软线；
4. 特别提醒：焊线过程中请特别注意白色线和黑色线的焊线方向，切不可将方向焊反。

⑪	housing	——	1	PA66	白色	
⑩	线材	——	3	镀锡铜线外包TPE	黑白白	
⑨	热缩套管	——	1	PVC	黑色	
⑧	弹片	——	1	SUS301-3/4H	——	
⑦	止动轮	——	1	POM	绿 色	UL 94HB
⑥	簧 片	——	1	磷铜(C5210R-EH)	——	
⑤	基 座	——	1	PA66+G/F30%	灰 色	UL 94HB
④	外 壳	——	1	不锈钢铁(430)	镀 镍	
③	端 子	1 2 3	1	H65Y(0.2t)	镀 银	
序号	零件名称	端子编号	用量	材 料	镀层/颜色	备 注
承 认			日期	 东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD		
设 计	吴 宇	2018/10/15				
审 核			名 称	EN8080编码器		
核 准			料 号	CEN808012W23		
未注尺寸公差			30<L ±0.30 10<L≤30 ±0.20 5<L≤10 ±0.15 L≤5 ±0.10 ±2°	单位: mm	比例: 1:1	视角 
			图 号	页次 1 OF 1		


	C	2016.04.06	修正图面，线材直径由0.6mm改为0.75mm 	章辉军	——	——
	B	2014.08.06	焊锡后高度小于1.05 	唐海华	——	——
——	A	——	NEW	——	——	——
工程变更单号	版次	日期	说明	修 改	审 核	核 准



KH-PS1812-08

产品规格书

Product Specification



CEN808012W23

Encoder Switch

[illegible]



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:	DOC. No.:	Rev.:	Page:
CEN808012W23	KH-PS1812-08	A	2/10

Content

目录

1. Scope/范围:	3
2. Product Application/产品应用：	3
3. Technology Parameters/技术参数	3
4. Ratings/额定性能要求	3
5. Profile Dimensions /外形尺寸	3
6. Electrical Performance/电气性能	4
7. Mechanical Performance/机械性能	6
8. Environmental Performance/环境性能	8
9. Precaution/注意事项	10
10. Packaging/ 包装	10

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



1. Scope/范围:

This Product Specification covers the requirement of Encoder switch on product performance, test methods and quality assurance provisions.
本规格书内容涵盖编码器产品的要求，包括性能指标、测试方法及质量保证方面等。

2. Product Application/产品应用:

The Switch is applied in all types of Computer mouse. Please let us know before using any of the products in the application not described above.
该编码器产品适用于所有类型的电脑鼠标，如果用于本文中未提及的领域请在使用前告知。

3. Technology Parameters/技术参数

Ambient Humidity 工作湿度:	$\leq 85\% \text{ R.H.};$
Operating Temperature Range 使用温度范围:	$-15^{\circ}\text{C} \sim +70^{\circ}\text{C};$
Storage Temperature Range 保存温度范围:	$-20^{\circ}\text{C} \sim +80^{\circ}\text{C};$
Normal Condition:	
Ambient temperature 环境温度:	$20 \pm 5^{\circ}\text{C}$
Relative humidity 相对湿度:	$65\% \pm 5\% \text{ R.H.};$
Air pressure 气压:	$86 \sim 101 \text{ KPa};$
Contact Resistance 接触阻抗:	$10 \Omega \text{ Max};$
Torque Force 扭矩:	$10 \sim 25 \text{ gf.cm};$
Solder Ability 可焊性:	$260 \pm 5^{\circ}\text{C}, 3\text{s(max)};$
Withstand Soldering Temperature 耐焊接热:	$260 \pm 5^{\circ}\text{C}, 3\text{s(max)};$
Pulse/Rotation 脉冲数	$12 \text{ Pulse}/360^{\circ}$
Numbers of detent 制动数	24

4. Ratings/额定性能要求

Rating 额定负荷:	DC5V / 各导线 1mA;
Insulation Resistance 绝缘电阻:	$\geq 50 \text{ M}\Omega / \text{DC } 50\text{V};$
Withstand Voltage 耐电压:	50V AC 1 Minute;
Mechanical Life 机械寿命:	200,000 Cycles (Without load).

5. Profile Dimensions /外形尺寸

见成品图




6. Electrical Performance/电气性能

Item 项目	Description 项目描述	Test Condition 测试条件		Requirement 规格要求
6.1	Contact Resistance 接触电阻	Measured by a Voltage drop method at 1A , 5VDC. Any equipment with error not more than 5% can be used. Resistance after test in the average of 5 successive measurements(To measure after operated 5 to 10 times) 以1A,5V直流电, 采用误差不超过5%的仪器测量,实验后的电阻取5次测量的平均值。(转动5-10次测量)		10Ω Max 10Ω 以下
6.2	Insulation Resistance 绝缘电阻	Apply a Voltage of DC 50 V for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body. 输入 50V DC 电压 1 分钟, 按如下接触方法测试: (1) 端子与端子之间. (2) 端子与外壳之间.		50MΩ Min 50 兆欧以上
6.3	输出信号 Output signal Format	Shaft rotational Derection 轴的回转方向	Signal 信号	Output 输出波形
		C.W 顺时针方向	A(A-C 端子间 A(TerminalA-C B(B-C 端子间) B(TerminalB-C	
		C.C.W 逆时针方向	A(A-C 端子间 A(TerminalA-C B(B-C 端子间) B(TerminalB-C	



P/N: CEN808012W23	DOC. No.: KH-PS1812-08	Rev.: A	Page: 5/10
-----------------------------	----------------------------------	-------------------	----------------------

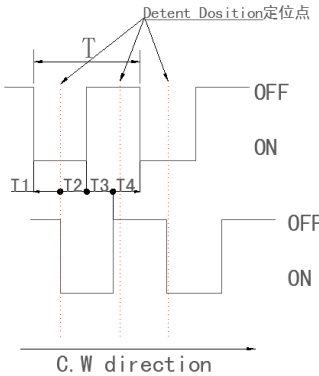


Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
6.8	Phase-Difference 相位差	Measurement shaft be made under the Condition which the shaft is rotated in constant speed. 以固定的速度操作轴进行回转。(360° 顺时针方向CW A信号 (A-C间) Signal A B信号 (B-C间) Signal B 	$T1、T2、T3、T4 \geq 5ms$
6.9	Dielectric withstanding voltage 耐电压	Apply a Voltage of AC 50 V (50~60Hz) for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body. 输入 50V AC 电压 1 分钟, 按如下接触方法测试: (1) 端子与端子之间. (2) 端子与外壳之间.	No evidence of breakdown 无瞬断、击穿等破坏

7. Mechanical Performance/机械性能

7.1	Detent torque 卡点扭力矩	Account the test with the torque within the scope of at 5°C-35°C temperature. 在 5°C-35°C 温度范围内用扭力计测试	10-25gf.cm
-----	------------------------	---	------------

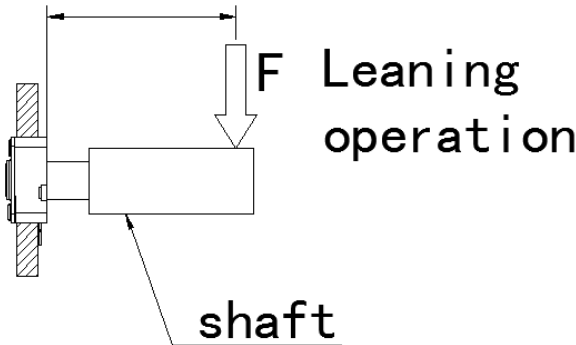


Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
7.2	Number and position of detent 定位点数及位置	N/A 不应用	24 detents(Step angle: $15^{\circ} \pm 3^{\circ}$) 24 点定位 (间隔角度: $15^{\circ} \pm 3^{\circ}$)
7.3	Push-pull strength of shaft 轴的推拉强度	Fixed the product to support and apply static force(F) of 50mN.m/5s as shown in the (fig5) 成品固定于支架上沿轴垂直方向施加 FXL=50mN.m/5s 荷重的压力。  shaft	Without damage to or excessive play in shaft no excessive abnormality in rotational feeling. And electrical characteristics shall be satisfied 产品不得有明显松动及接触不良, 电气性能异常.
7.4	Rotational life 回转寿命	The shaft of encoder shall be rotated to 200,000 cycles at a speed of 30 cycles per minute without electrical load after which measurements shall be made. 在无负荷条件下轴以 30 次/分钟的速度回转 200, 000 次.	Please difference T1、T2、T3、T4$\geq$ 2.5ms 相位差 T1、T2、T3、T4$\geq$2.5ms



8. Environmental Performance/环境性能

Item 项目	Description 项目描述	Test Condition 测试条件	Requirement 规格要求															
8.1	Cold test 耐寒性	(1) Temperature : - 20±2℃ 温度： - 20±2℃ (2) Duration of test: 96h 持续时间： 96 小时 (3) Take off a drop water 去掉水珠 (4) Standard conditions after test : 1h 试验后的放置条件： 1 小时	Contact resistance: 10 Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 10 Ω 以下 满足: No. 6.1 to 6.9 No. 7.1 to 7.3															
8.2	Heat test 耐热性	(1) Temperature : 80±2℃ 温度： 80±2℃ (2) Duration of test: 96h 持续时间： 96 小时 (3) Take off a drop water 去掉水珠 (4) Standard conditions after test : 1h 试验后的放置条件： 1 小时	Contact resistance: 10 Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 10 Ω 以下 满足: No. 6.1 to 6.9 No. 7.1 to 7.3															
8.3	Temperature cycle 温度循环	(1) Test cycles: 5 cycles 试验周期： 5 个周期 (2) Standard condition after test:1h 试验后的放置条件： 1 小时 <table><tr><td></td><td>Temperature 温度</td><td>Duration of test 持续时间</td></tr><tr><td>1 cycle 一次循环</td><td>20±2℃</td><td>1h</td></tr><tr><td></td><td>-20±2℃</td><td>1h</td></tr><tr><td></td><td>20±2℃</td><td>1h</td></tr><tr><td></td><td>80±2℃</td><td>1h</td></tr></table>		Temperature 温度	Duration of test 持续时间	1 cycle 一次循环	20±2℃	1h		-20±2℃	1h		20±2℃	1h		80±2℃	1h	Contact resistance: 10 Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 10 Ω 以下 满足: No. 6.1 to 6.9 No. 7.1 to 7.3
	Temperature 温度	Duration of test 持续时间																
1 cycle 一次循环	20±2℃	1h																
	-20±2℃	1h																
	20±2℃	1h																
	80±2℃	1h																
8.4	Soldering heat test 耐焊接热	Soldering area: T/2 of PWB thickness. (PWB: T=1.6mm) 焊接面积： 印刷基板的 1/2 厚度处 Soldering temperature: 260±5℃ Soldering time: 3s(max) 焊接温度： 260±5℃ 焊接时间： 3s(max)	Appearance: No abnormality. 外观无异常															

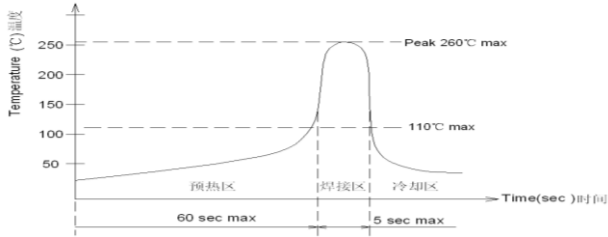

Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
8.5	Solderability 可焊性	1. Hand soldering 手工焊接: Please practice according to below condition: (1) Soldering Temperature : $350 \pm 5^{\circ}\text{C}$ 焊接温度: $350 \pm 5^{\circ}\text{C}$ (2) Continual soldering time: $3 \pm 1\text{s}$ 连续焊接时间: 3 ± 1 秒 (1) Capacity of soldering iron: $\leq 20\text{w}$ 电烙铁功率: 20 瓦以下 2. Automatic PIP soldering 自动波峰焊接: For the product of T/H, according to below condition: 	At least 95% of surface area of immersed portion shall be covered by solder. 侵焊面积大于 95%以上.
8.6	Humidity test 耐湿性	(1) Temperature : $60 \pm 2^{\circ}\text{C}$ 温度: $60 \pm 2^{\circ}\text{C}$ (2) relative humidity: 90~95% R.H. 相对湿度: 90~95% R.H. (3) Duration of test: 96h 持续时间: 96 小时 (4) Take off a drop water 去掉水珠 (5) Standard conditions after test: 1h 试验后的放置条件: 1 小时	Contact resistance: 5Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 10Ω 以下 满足: No. 6.1 to 6.9 No. 7.1 to 7.3
8.7	Salt Spray 盐雾测试	Apply the following environment to test: 根据下列条件进行测试: (1) Temperature : $35 \pm 5^{\circ}\text{C}$ 温度: $35 \pm 5^{\circ}\text{C}$; (2) Salt water density: $5 \pm 1\%$ 盐水浓度: $5 \pm 1\%$; (3) Duration: 8 hours 持续时间: 8 小时; (4) After test, the salt deposit shall be removed by running water. 实验后将盐沉积物用水冲掉	Appearance: No corrosion spot, no crack, no base plate naked. 外观: 无腐蚀点, 无裂纹, 无裸露基材. Contact Resistance: 10Ω Max 接触电阻: 10 欧以下

 凱華電子 KAIHUA EEELETRONICS Product Specification <table><tr><td>P/N:</td><td>DOC. No.:</td><td>Rev.:</td><td>Page:</td></tr><tr><td>CEN808012W23</td><td>KH-PS1812-08</td><td>A</td><td>10/10</td></tr></table>		P/N:	DOC. No.:	Rev.:	Page:	CEN808012W23	KH-PS1812-08	A	10/10		
P/N:	DOC. No.:	Rev.:	Page:								
CEN808012W23	KH-PS1812-08	A	10/10								
Item 项目	Description 项目描述	Test Condition 测试条件	Requirement 规格要求								
8.8	Withstand K ₂ S 硫化测试	Apply the following environment to test: 根据下列条件进行测试 (1) Temperature: 35±5℃ 温度: 35±5℃ (2) K₂S Density: 2%; 硫化钾浓度: 2% (3) Duration: 2 minute. 持续时间: 2 分钟	Appearance: No corrosion spot, no crack, no base plate naked. 外观: 无腐蚀点, 无裂纹, 无裸露基材. Contact Resistance: 10 Ω Max 接触电阻: 10 欧以下								

9.Precaution 注意事项

(1) Please be cautious not to give excessive static load or shock to switches.
注意不要施加超负荷的压力或晃动开关.

(2) Please be careful not to stack up P. W. B. after switches were soldered.
开关焊接以后,印刷基板注意不要叠放.

(3) Preservation under high temperature and high humidity or corrosive gas should be avoided
Especially. When you need to preserve for a long period, do not open the carton.
保管时尤其应注意避开高温高湿和有腐蚀性气体的环境. 如需长时间保存,请不要打开包装箱.

(4) Products meet the ROHS & REACH environmental management substances control standards
产品满足 ROHS & REACH 环境管理物质管制标准

10.Packaging 包装

Packaging type: PE Bag, 500Pcs/Bag, 2*500*10Pcs/Carton.

包装方式: PE 袋, 500Pcs/袋. 2*500*10Pcs/箱

205

275

环保PE袋

410

175

260

环保外箱
材质: K=K

ITEM NO
P/N
REV
QTY
DATE
KAIHUA EEELETRONICS

ITEM NO
P/N
REV
QTY
DATE
KAIHUA EEELETRONICS

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD