



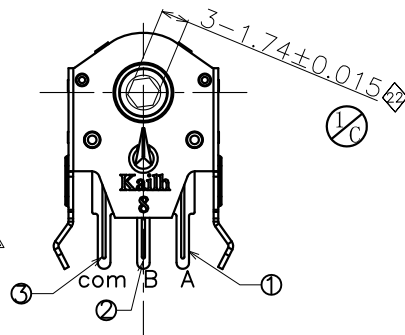
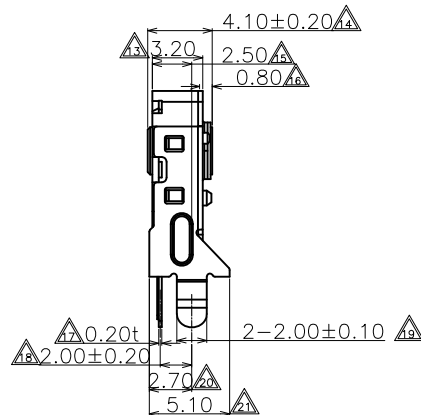


成品检验图纸

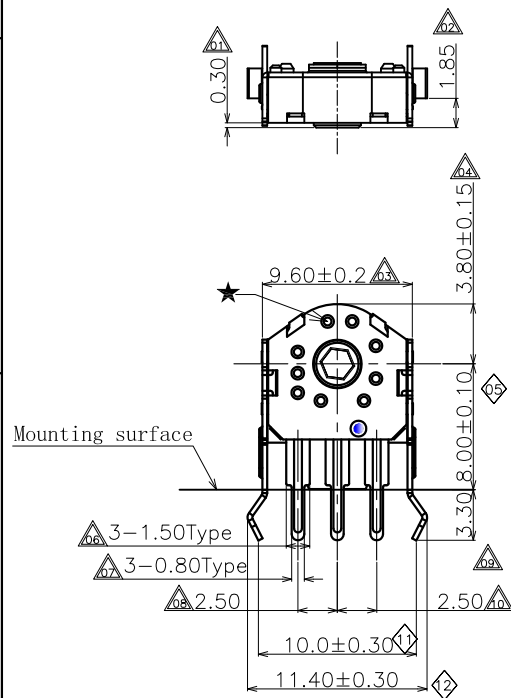

产品规格


- 1. 额定电压: D.C.5V
- 2. 最大额定电流 (阻抗负载) 各导线 :1mA
- 3. 分析能力: 每12个脉冲/360°
- 4. 接触电阻: 5Ω (最大)
- 5. 绝缘阻抗: 50MΩ (最小) DC50V
- 6. 耐电压: AC50V(50-60Hz) 持续1分钟
- 7. 卡点扭力矩: 10-20gf.cm
- 8. 寿命测试: 200,000次 (最小)
(频率: 60次/分钟 正反转一周算一次)
- 9. 该产品需符合《凯华环境有害物质管制标准》

备注:


◇: 表示重点管控尺寸, 一般为功能尺寸, 首检时需量测。
 △: 表示次重点管控尺寸, 一般为装配尺寸, 首检时需量测。
 1) 重点及次重点管控尺寸中的序号不可重复, 需依次往后增加。若其中有某个尺寸在变更或其它状况下, 尺寸消失或不要求管控时, 原序号不可再用。有其它尺寸需要增加管控时, 序号往后增加。
 2) 版次定义: 新开发而未转量产之产品图面版次为A1, A2, A3...
 已转量产之产品图面版次为A, B, C...

轴孔的尺寸和形状

轴孔是可以任意旋转的

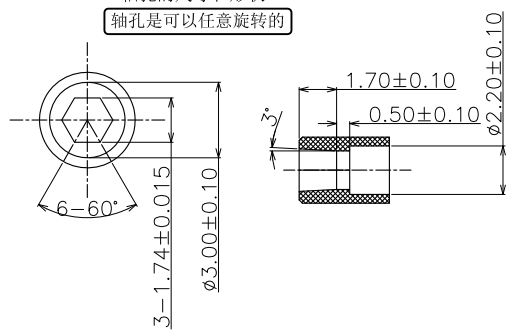

(P. C. B板的厚度T=1.6mm)

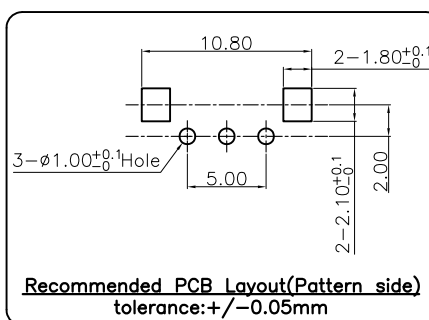

备注: 底座背面的压针孔★是根据产品模具成型要求而定的, 其规格的大小与数量的多少对产品结构、功能及使用无任何影响。

ECN-2012-10	C	2020.12.11	六方孔孔径公差收严管控为±0.015	吴 宇		
ECN-1807-03	B	2018.07.04	止动轮用料由F20-03变为FM090	吴 宇		
	A		NEW			
工程变更单号	版次	日期	说明	修改	审核	核准

⑥	BWEN98XX-03016	偏轻扭力弹片	1	SUS301-H		
⑤	BSEN98XX-05000	止动轮	1	POM(FM090)	黑色	UL 94HB
④	BWEN98XX-03010	簧 片	1	C5210-EH		
③	BZEN98XX-02037SG	基 座	1	PA66+G/F30%	黑色	UL 94HB
②	BWEN98XX-06005X0	外 壳	1	铁皮 (SPCC)	镀Ni 40u"以上	
①	BWEN98XX-01029	端 子	1	黄铜 (H65Y)	镀Ag 8u"以上	
序号	物料料号	零件名称	端子编号	用量	材 料	镀层/颜色 备 注
承 认			日期	东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD		
设 计	吴 宇	2018.07.04	名 称	EN9880 B型编码器		
审 核			料 号	CEN988012R21		
核 准			图 号	KHA-EN9880-007		
未注尺寸公差			30<L 10<L≤30 5<L≤10 L≤5	±0.30 ±0.20 ±0.15 ±0.10	角 度 ±2°	单位: mm 比例: 1:1 视角
			图 号	KHA-EN9880-007		
			图 号	KHA-EN9880-007		




Document Number:

KH-PS2002-03

产品规格书

Product Specification

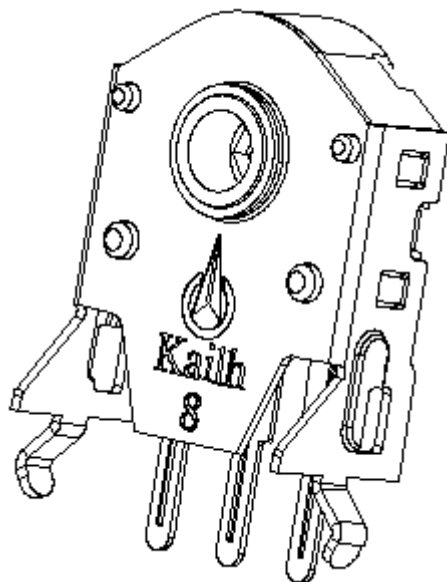

P/N:

CEN988012R21

Title :

Encoder Switch

[illegible]



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:	DOC. No.:	Rev.:	Page:
CEN988012R21	KH-PS2002-03	A	2/12

Content

目录

1. Scope/范围:	3
2. Product Application/产品应用 :	3
3. Technology Parameters/技术参数	3
4. Ratings/额定性能要求	3
5. Profile Dimensions /外形尺寸	3
6. Electrical Performance/电气性能	4
7. Mechanical Performance/机械性能	5
8. Environmental Performance/环境性能	7
9. Recommended PCB Layout/推荐的 PCB 安装焊盘规格	10
10. Packaging/ 包装	10
11. Precaution/注意事项	11

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD



1. Scope/范围:

This Product Specification covers the requirement of Encoder switch on product performance, test methods and quality assurance provisions.
本规格书内容涵盖编码器产品的要求，包括性能指标、测试方法及质量保证方面等。

2. Product Application/产品应用:

The Switch is applied in all types of Computer mouse. Please let us know before using any of the products in the application not described above.
该编码器产品适用于所有类型的电脑鼠标，如果用于本文中未提及的领域请在使用前告知。

3. Technology Parameters/技术参数

Ambient Humidity 工作湿度:	$\leq 85\% \text{ R.H.};$
Operating Temperature Range 使用温度范围:	$-15^{\circ}\text{C} \sim +70^{\circ}\text{C};$
Storage Temperature Range 保存温度范围:	$-20^{\circ}\text{C} \sim +80^{\circ}\text{C};$
Normal Condition:	
Ambient temperature 环境温度:	$20 \pm 5^{\circ}\text{C}$
Relative humidity 相对湿度:	$65 \pm 5\% \text{ R.H.};$
Air pressure 气压:	$86 \sim 101 \text{ KPa};$
Contact Resistance 接触阻抗:	$5 \Omega \text{ Max};$
Torque Force 扭矩:	$10 \sim 20 \text{ gf.cm};$
Solder Ability 可焊性:	$350 \pm 5^{\circ}\text{C}, 3\text{s}(\text{max});$
Pulse/Rotation 脉冲数	$12 \text{ Pulse}/360^{\circ}$
Numbers of detent 制动数	24

4. Ratings/额定性能要求

Rating 额定负荷:	DC5V / 各导线 1mA;
Insulation Resistance 绝缘电阻:	$\geq 50 \text{ M}\Omega / \text{DC } 50\text{V};$
Withstand Voltage 耐电压:	50V AC 1 Minute;
Mechanical Life 机械寿命:	200,000 Cycles . (Without load)

5. Profile Dimensions /外形尺寸



见成品图




6. Electrical Performance/电气性能

Item 项目	Description 项目描述	Test Condition 测试条件		Requirement 规格要求
6.1	Contact Resistance 接触电阻	Measured by a Voltage drop method at 1A , 5VDC. Any equipment with error not more than 5% can be used. Resistance after test in the average of 5 successive measurements(To measure after operated 5 to 10 times) 以1A,5V直流电, 采用误差不超过5%的仪器测量,实验后的电阻取5次测量的平均值。(转动5-10次测量)		5 Ω Max 5 Ω 以下
6.2	Insulation Resistance 绝缘电阻	Apply a Voltage of DC 50 V for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body. 输入 50V DC 电压 1 分钟, 按如下接触方法测试: (1) 端子与端子之间. (2) 端子与外壳之间.		50M Ω Min 50 兆欧以上
6.3	输出信号 Output signal Format	Shaft rotational Derection 轴的回转方向	Signal 信号	Output 输出波形
		C.W 顺时针方向	A(A-C 端子间 A(TerminalA-C) B(B-C 端子间) B(TerminalB-C)	
		C.C.W 逆时针方向	A(A-C 端子间 A(TerminalA-C) B(B-C 端子间) B(TerminalB-C)	

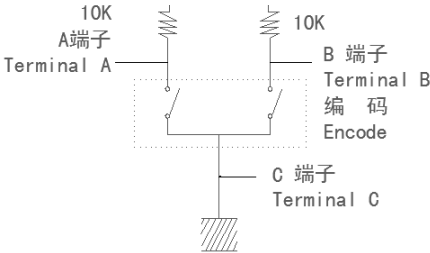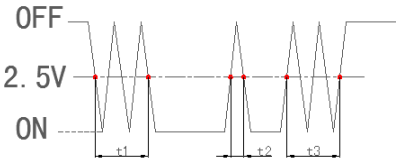

Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
6.4	Resolution 分析能力	Number of pulses in 360° rotation 回转一周的输出脉动数	12 pulses/360° for each phase 每 12 个脉动/360°
6.5	Switching Characteristics 开关特性	Measurement shall be made under the condition as follows. Shaft rotational speed :360° /S 下图所示回路，轴以360° /S的速度回转测定。   (NOTE) Code-ON area : The area which the voltage is 2.5V or less Code-OFF area : The area which the voltage is 2.5V or more (注) 编码器 ON 指输出电压2.5V以下的状态。 编码器 OFF 指输出电压2.5V以上的状态。	
6.6	Chattering 振荡	Specified by the signal's passage time from 2.5V of each switching position(code OFF→ON 或 ON→OFF) 编码器 OFF→ON 或 ON→OFF 时，输出 2.5V 的通过时间应符合规定。	$t1.t3 \leq 3ms$
6.7	Bounce 突跳	Specified by the time of voltage change exceed 2.5V in code-ON area. When the bounce has code-ON time less than 1ms between chattering($t1$ or $t3$),the voltage change shall be regarded as a part of chattering. When the code-ON time between 2 bounces is less than 1ms. They are regarded as 1 linked bounce. 编码 ON 部分的 2.5V 以上的电压变动时 间在振荡 $t1.t3$ 之间会产生 1ms 以上 2.5V 以下的 ON 部分，另外，如果各突跳间 2.5V 以下的范围在 1ms 以上时，则判定为另一个 突跳。	$t2 \leq 2ms$

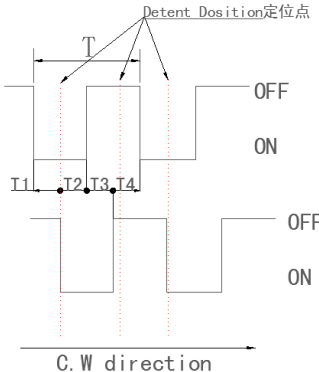


Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
6.8	Phase-Difference 相位差	Measurement shaft be made under the Condition which the shaft is rotated in constant speed. 以固定的速度操作轴进行回转。(360° /S) 顺时针方向CW A信号 (A-C间) Signal A B信号 (B-C间) Signal B 	$T1、T2、T3、T4 \geq 5ms$
6.9	Dielectric withstanding voltage 耐电压	Apply a Voltage of AC 50 V (50~60Hz) for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body. 输入 50V AC 电压 1 分钟, 按如下接触方法测试: (1) 端子与端子之间. (2) 端子与外壳之间.	No evidence of breakdown 无瞬断、击穿等破坏

7. Mechanical Performance/机械性能

7.1	Detent torque 卡点扭力矩	Account the test with the torque within the scope of at 5°C-35°C temperature. 在 5°C-35°C 温度范围内用扭力计测试	10-20gf.cm
-----	------------------------	---	------------

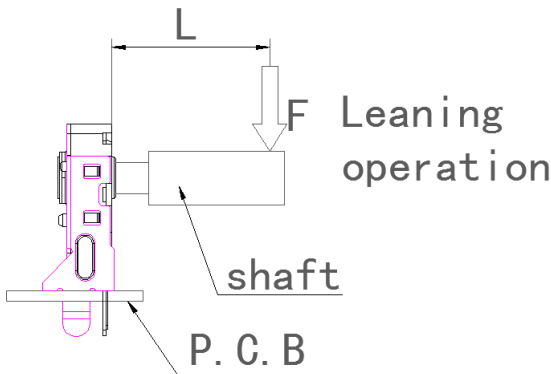


Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
7.2	Number and position of detent 定位点数及位置	N/A 不应用	24 detents(Step angle: $15^{\circ} \pm 3^{\circ}$) 24 点定位 (间隔角度: $15^{\circ} \pm 3^{\circ}$)
7.3	Push-pull strength of shaft 轴的推拉强度	Mount the product to P.C.B and apply static force(F) of 50mN.m/5s as shown in the (fig5) 制品焊接于 P.C.B(图 5)沿轴垂直方向施加 FXL=50mN.m/5s 荷重的压力。 	Without damage to or excessive play in shaft no excessive abnormality in rotational feeling. And electrical characteristics shall be satisfied 端子不得有明显松动及接触不良, 电气性能异常.
7.4	Rotational life 回转寿命	The shaft of encoder shall be rotated to 200,000 cycles at a speed of 30 cycles per minute without electrical load after which measurements shall be made. 在无负荷条件下轴以 30 次/分钟的速度回转 200, 000 次。	Please difference $T1、T2、T3、T4 \geq 2.5ms$ Contact resistance: 10Ω Max 相位差 $T1、T2、T3、T4 \geq 2.5ms$ 接触电阻 10Ω 以下



8. Environmental Performance/环境性能

Item 项目	Description 项目描述	Test Condition 测试条件	Requirement 规格要求												
8.1	Cold test 耐寒性	(1) Temperature : - 20±2℃ 温度： - 20±2℃ (2) Duration of test: 96h 持续时间： 96 小时 (3) Take off a drop water 去掉水珠 (4) Standard conditions after test : 1h 试验后的放置条件： 1 小时	Contact resistance: 5 Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 5 Ω 以下 满足： No. 6.1 to 6.9 No. 7.1 to 7.3												
8.2	Heat test 耐热性	(1) Temperature : 80±2℃ 温度： 80±2℃ (2) Duration of test: 96h 持续时间： 96 小时 (3) Take off a drop water 去掉水珠 (4) Standard conditions after test : 1h 试验后的放置条件： 1 小时	Contact resistance: 5 Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 5 Ω 以下 满足： No. 6.1 to 6.9 No. 7.1 to 7.3												
8.3	Temperature cycle 温度循环	(1) Test cycles: 5 cycles 试验周期： 5 个周期 (2) Standard condition after test:1h 试验后的放置条件： 1 小时 <table><tr><td></td><td>Temperature 温度</td><td>Duration of test 持续时间</td></tr><tr><td rowspan="4">1 cycle 一次循环</td><td>20±5℃</td><td>30min</td></tr><tr><td>-20±2℃</td><td>15min</td></tr><tr><td>20±5℃</td><td>30min</td></tr><tr><td>80±5℃</td><td>15min</td></tr></table>		Temperature 温度	Duration of test 持续时间	1 cycle 一次循环	20±5℃	30min	-20±2℃	15min	20±5℃	30min	80±5℃	15min	Contact resistance: 5 Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 5 Ω 以下 满足： No. 6.1 to 6.9 No. 7.1 to 7.3
	Temperature 温度	Duration of test 持续时间													
1 cycle 一次循环	20±5℃	30min													
	-20±2℃	15min													
	20±5℃	30min													
	80±5℃	15min													
8.4	Soldering heat test 耐焊接热（插 件编码器不 适用）	Soldering area: T/2 of PCB thickness. (PCB: T=1.6mm) 焊接面积：印刷基板的 1/2 厚度处 Soldering temperature: 260+0/-5℃ Soldering time: 3s(max) 焊接温度： 250+0/-5℃ 焊接时间： 3 秒最大	Appearance: No abnormality. 外观无异常												

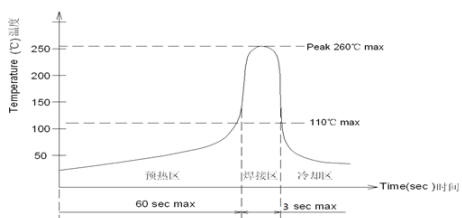

Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
8.5	Solderability 可焊性	1. Hand soldering 手工焊接: Please practice according to below condition: (1) Soldering Temperature : $350 \pm 5^{\circ}\text{C}$ 焊接温度: $350 \pm 5^{\circ}\text{C}$ (2) Continual soldering time: 3s(max) 连续焊接时间: 3 秒最大 (1) Capacity of soldering iron: $\leq 20\text{w}$ 电烙铁功率: 20 瓦以下 2. Automatic PIP soldering 自动波峰焊接: For the product of T/H, according to below condition: 	At least 95% of surface area of immersed portion shall be covered by solder. 侵焊面积大于 95%以上.
8.6	Humidity test 耐湿性	(1) Temperature : $40 \pm 2^{\circ}\text{C}$ 温度: $40 \pm 2^{\circ}\text{C}$ (2) relative humidity: 90~95% R.H. 相对湿度: 90~95% R.H. (3) Duration of test: 96h 持续时间: 96 小时 (4) Take off a drop water 去掉水珠 (5) Standard conditions after test: 1h 试验后的放置条件: 1 小时	Contact resistance: 5Ω Max Shall meet : No. 6.1 to 6.9 No. 7.1 to 7.3 接触电阻 5Ω 以下 满足: No. 6.1 to 6.9 No. 7.1 to 7.3
8.7	Salt Spray 盐雾测试	Apply the following environment to test: 根据下列条件进行测试: (1) Temperature : $35 \pm 5^{\circ}\text{C}$ 温度: $35 \pm 5^{\circ}\text{C}$; (2) Salt water density: $5 \pm 1\%$ 盐水浓度: $5 \pm 1\%$; (3) Duration: 8 hours 持续时间: 8 小时; (4) After test, the salt deposit shall be removed by running water. 实验后将盐沉积物用水冲掉	Appearance: No corrosion spot, no crack, no base plate naked. 外观: 无腐蚀点, 无裂纹, 无裸露基材. Contact Resistance: 5Ω Max 接触电阻: 5Ω 以下




Item 項目	Description 項目描述	Test Condition 测试条件	Requirement 规格要求
8.8	Withstand K ₂ S 基座硫化测试	Apply the following environment to test: 根据下列条件进行测试 (1) Temperature: 35±5℃ 温度: 35±5℃ (2) K ₂ S Density: 2%; 硫化钾浓度: 2% (3) Duration: 2 minute. 持续时间: 2 分钟	Appearance: No corrosion spot, no crack, no base plate naked. 外观: 无腐蚀点, 无裂纹, 无裸露基材. Contact Resistance: 5Ω Max 接触电阻: 5Ω 以下

9. Recommended PCB Layout 推荐的 PCB 安装焊盘规格

(Top View)


(Single face board T=1.6mm)

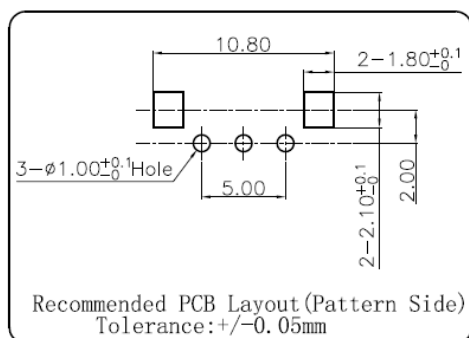

10. Packaging 包装

Packaging type: PE Bag, 1000Pcs/Bag, 1000*10Pcs/Carton.

包装方式: PE 袋, 1000Pcs/袋. 1000*10Pcs/箱

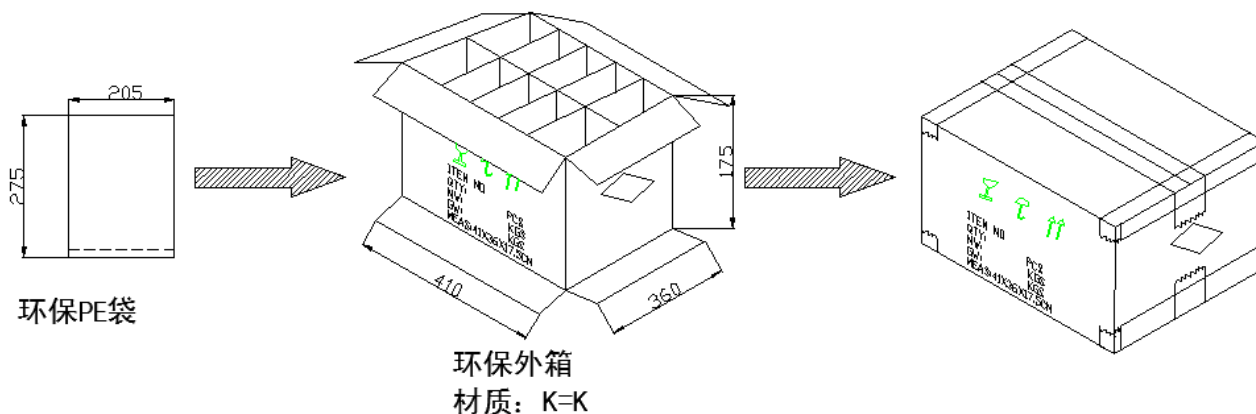



11.Precaution 注意事项

11.1 Immersion Soldering condition 浸焊条件

ITEM 项目	CONDITION 条 件
Preheat temperature 预热温度	110℃ Max (Ambient temperature of soldering surface of P.W.B) 110℃ 以下(印刷基板焊锡面周围的温度)
Preheat time 预热时间	60s, Max 60 秒以内
Area of flux 助焊剂面积	1/2 Max of PWB Thickness 印刷基板厚度的 1/2 以内
Temperature of solder 焊锡温度	260+0/-5℃ 260+0/-5℃
Time of immersion 浸焊时间	Within 3s 3 秒以内
Number of soldering 焊接次数	2time Max (But should down heat of the first soldering) 2 次以内
Printed wiring board 印刷基板	Single side copper-clad laminates 单面铜箔

- (1) After switches were soldered, please be careful not to clean switches with solvent
开关浸焊后,注意不要用溶剂清洗.
- (2) Under the condition of using soldering iron, soldering temperature shall be 350℃ max within 3 sec.
在使用铬铁的情况下,焊锡温度应在350℃以下,焊接时间3秒以内.

11.2 Notes 注意点

- (1) Please be cautious not to give excessive static load or shock to switches.
注意不要施加超负荷的压力或晃动开关.
- (2) Please be careful not to stack up P. W. B. after switches were soldered.
开关焊接以后,印刷基板注意不要叠放.
- (3) Preservation under high temperature and high humidity or corrosive gas should be avoided
Especially. When you need to preserve for a long period, do not open the carton.
保管时尤其应注意避开高湿高温和有腐蚀性气体的环境. 如需长时间保存,请不要打开包装箱.
- (4) The standard storage period is 3 months, with maximum up to 6months, preferably to be used as soon as possible. After opening the package, you should put the remaining switches in a plastic bag to prevent from damp and corrosive gas.
保存标准为 3 个月,限度为 6 个月以内,请尽早使用. 打开包装后,有剩余品时,应将剩余部分以胶袋包装好以同外界隔离,请进行合适的防湿,防腐蚀气体等处理后进行保管.
- (5) This Product Specification is considered as the technical agreement on product between the receiving customer and Kailh. Any information on Product Catalogue which is in conflict with or different from the corresponding information of this document is considered as invalid.
该规格书为客户与凯华公司产品在技术方面的共识,其他相关数据上与该规格书不一致的内容都是无效



凱華電子
KAIHUA EEELETRONICS

Product Specification

P/N:	DOC. No.:	Rev.:	Page:
CEN988012R21	KH-PS2002-03	A	12/12

的.

- (6) If customer issue purchase orders without confirmation by signature of this specification after receipt, such confirmation will be considered as granted upon receipt of the first purchase order.

如果顾客收到规格书后没有信息反馈而直接向我公司订货，我们将认为贵客已接受此规格书.

- (7) If there is no order or no request for new specification after 1 year upon this specification is issued, the specification will be regarded as invalid.

本产品规格书从生效日起 1 年后，如果没有订货或再次申请最新规格书时请做无效处理.

- (8) Products meet the ROHS & REACH environmental management substances control standards

产品满足 **ROHS & REACH** 环境管理物质管制标准

“ Confidential ”

All Right Reserved COPYRIGHT Kaihua Electronics Co.,LTD