
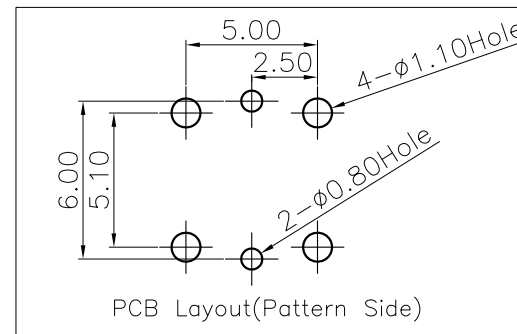
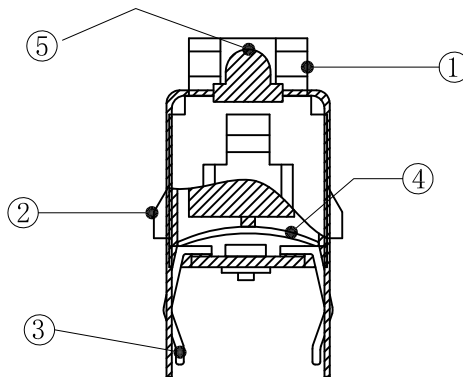
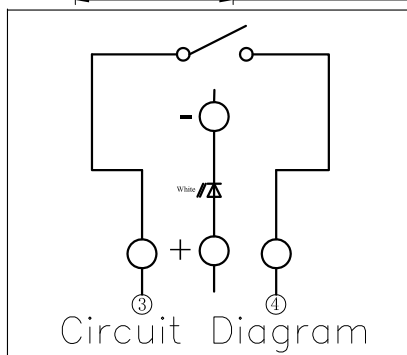
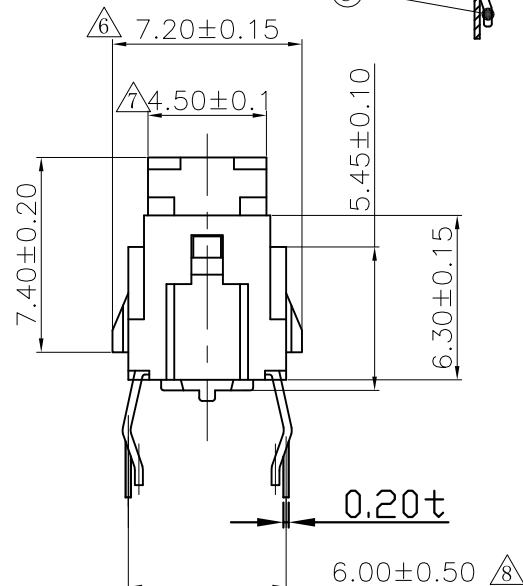
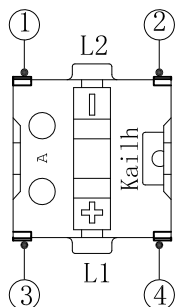
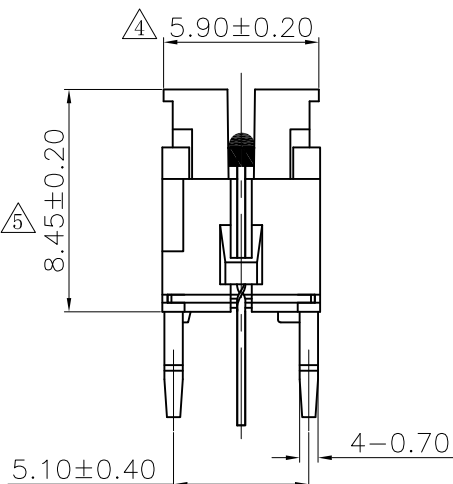


ABIDE BY WEEE & ROHS

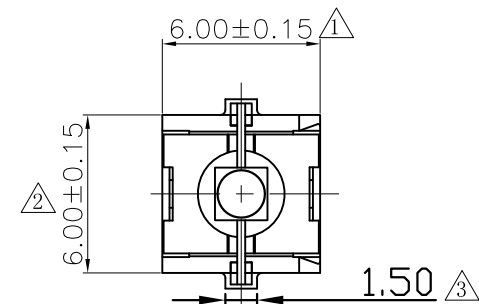


Specification :

- 1. Rated voltage: DC 12V 50mA;
- 2. Contact Resistance: 100mΩ (Max);
- 3. Insulation resistance: 100MΩ (Min) DC250V;
- 4. Dielectric strength: AC250V (50-60Hz) for 1 minute;
- 5. Operation force: 150±50gf;
- 6. Travel closure: 0.25±0.10;
- 7. Life Test : 1,000,000 Cycles (min).

⑤	LED	——	1	φ 1.8mm Super bright White LED		
④	Contact	——	1	Stainless Steel	Plating Silver	——
③	Terminal	——	1	Brass	Plating Silver	——
②	Base	——	1	Nylon	Black	——
①	Keystoke	——	1	Nylon	White	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	<div><div>东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO., LTD</div></div>		
DRAWN	QIAO KE	2022.09.14				
CHECKED				TITLE:	LA6063 LAWP Switch	
APPROVALS				PART NO:	CLA606301D02	
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10<L≤30	±0.20				
	5<L≤10	±0.15				
	L≤5	±0.10				
			±2°	DRAWING NO.	SHEET: 10F	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
5	A					

Product Specification

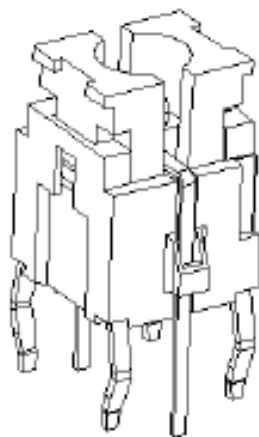

P/N: _____

CLA606301D02

Title :

Lamp Switch

Rev.	ECN	Release and Revision Description:	Prepared By /Date:	Checked By/Date:	Approved By/Date:
A	— —	New releasing	HQC 2018/10/11	LPH 2018/10/11	YP2018/10/11

P/N: CLA606301D02	DOC. No.: KH-PS1704-08	Rev.: A	Page: 2/9
-----------------------------	----------------------------------	-------------------	---------------------

Content

1. Scope:	3
2. Product Application :	3
3. Technology Parameters:	3
4. Rated Performance Requirements:	3
5. Profile Dimensions:	3
6. Electrical Performance:	4
7. Mechanical Performance:	5
8. Environmental Performance:	7~8
9. Recommended PCB Layout:	8
11. Packaging:	8
12. Precaution:	9

1. Scope:

This Product Specification covers the requirement of Micro switch on product performance, test methods and quality assurance provisions.

2. Product Application:

The Switch is applied in all types of electrical appliances. Please let us know before using any of the products in the application not described abovev.

3. Technology Parameters:

Ambient Humidity:	45~85% R.H.;
Operating Temperature Range:	-10℃~+70℃;
Storage Temperature Range:	-20℃~+80℃;
Suggested storage period :	about 6 months


Normal Condition:

Ambient temperature:	20±5
Relative humidity:	65%±5% R.H.;
Air pressure :	86~101KPa;
Contact Resistance:	100 mΩ Max;
Operation Force:	150±50gf
Solder Ability :	Tim-lead soldering : 245℃±5℃ 5s±0.5s;
	Lead-free welding : 255℃±5℃ 5s±0.5s;
Withstand Soldering Temperature:	Wave soldering: 260±5℃ 5±0.5s;


4. Rated Performance Requirements:

Rating:	DC12V / 50mA
Insulation Resistance:	≥100MΩ/DC 250V;
Withstand Voltage:	250V AC 1 Minute;
Mechanical Life:	100,000 Cycles.


5. Profile Dimensions :

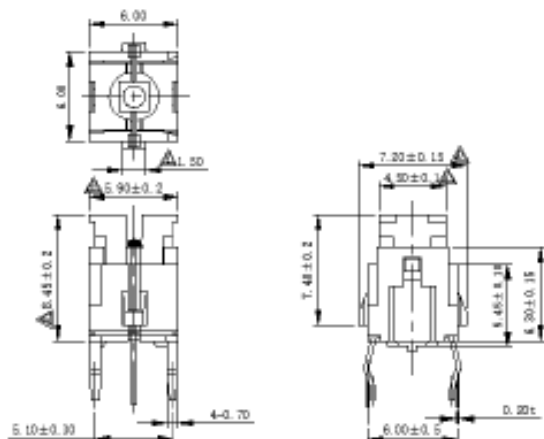


6. Electrical Performance:

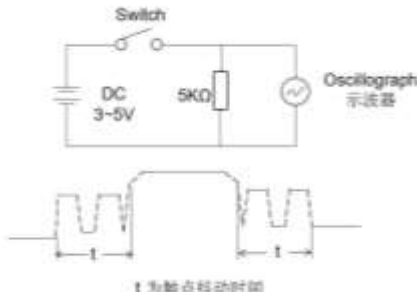Item	Description	Test Condition	Requirement
6.1	Contact Resistance	<p>Static load: (Operation force)x2, which is applied on the center of Switch stem. Be measured when the switch contact stabilization.</p> <p>Measurement tool: Contact resistance Meter. (1KHz, 20mV, 5~50mA)</p> <p>Measured at low current (100mA or less).</p>	100mΩ Max
6.2	Insulation Resistance	<p>Apply a Voltage of DC 250 V for 1 minute, according to the below method.</p> <p>(1) Between terminals. (2) Between terminal and Body.</p>	100MΩ Min
6.3	Dielectric withstanding voltage	<p>Apply a Voltage of AC250 V (50~60Hz) for 1 minute, according to the below method.</p> <p>(1) Between terminals. (2) Between terminal and Body.</p>	No evidence of breakdown.
6.4	Bouncing	<p>Operation speed: 3~4 times/s Oscilloscope Switch Bouncing Test Circuit.</p>  <p>t 为触点抖动时间</p>	<p>Before Life cycle: On: 5ms MAX Off: 5ms MAX</p> <p>After Life cycle: On: 10ms MAX Off: 10ms MAX</p>

7. Mechanical Performance:

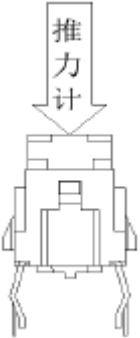It	Description	Tes Condition	Requirement
7.1	Operation force	Operate the keystroke of the switch and then increase press strength gradually, Measured maximum operation force while the travel of the switch is full.	$150 \pm 50\text{gf}$
7.2	Travel	Operate the keystroke of the switch vertically, the travel distance of keystroke moving from its free position to maximum moving distance shall be measurement.	$0.25 \pm 0.1\text{mm}$
7.3	Static Strength	<p>A static load of 3kgf shall be applied in the direction of button operation for a period of 60 seconds.</p> 	No damage (Electrical and mechanical)
7.4	Stem Pull Strength	Break by a pull force applied opposite to the direction of stem operation.	500gf Min

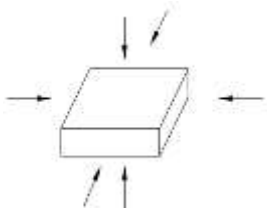7.5	Shock	<p>Measured by according to the below condition:</p> <p>(1) Acceleration: 80g accelerated speed</p> <p>(2) Cycles of test: 3 cycles each in 6 directions, for a total of 18 cycles.</p> 	Shall meet No.6, 7.1, 7.2
7.6	Life Test	<p>(1) 1 Weight: 300gf</p> <p>(2) Operation speed: 60 cycles/min</p> <p>(3) Push force: Maximum value of operation force.</p> <p>(4) Cycles: 100,000 times Min</p>	<p>Contact resistance: 250 Ω Max</p> <p>Bouncing: 10ms Max</p> <p>Operation force and tactile force: Variation rate within $\pm 30\%$</p>

8. Environmental Performance:

Item	Description	Test Condition	Requirement
8.1	Cold test	<p>(1) Temperature : $-20 \pm 2^{\circ}\text{C}$</p> <p>(2) Duration of test: 96h</p> <p>(3) Take off a drop water</p> <p>(4) Standard conditions after test : 1</p>	<p>Contact resistance: 200m Ω Max</p> <p>Shall meet : No. 6.2 to 6.4</p> <p>No. 7.1 to 7.2</p>
8.2	Heat test	<p>(1) Temperature : $80 \pm 2^{\circ}\text{C}$</p> <p>(2) Duration of test: 96h</p> <p>(3) Take off a drop water</p> <p>(4) Standard conditions after test : 1h</p>	<p>Contact resistance: 200m Ω Max</p> <p>Shall meet : No. 6.2 to 6.4</p> <p>No. 7.1 to 7.2</p>

8.3

Temperature
cycle

- (1) Test cycles: 5 cycles
(2) Standard condition after test: 1h

	Temperature	Duration of test
1 cycle	20±5℃	1h
	-20±5℃	1h
	20±5℃	h
	80±5℃	1


Contact resistance:
200mΩ Max
Shall meet :
No. 6.2 to 6.4
No. 7.1 to 7.2

8.4

Soldering
heat test

Soldering area: 1/2 of PWB thickness.
(PWB: T=1.6mm)

Soldering temperature: 260±5℃
Soldering time: 5±0.5s

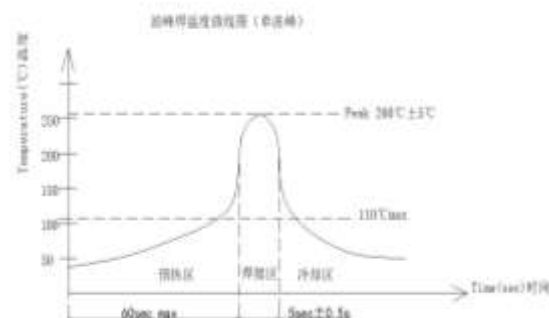

Appearance:
No abnormality.

8.5

Solder
ability

Lead-tin soldering:
Soldering temperature: 245±5℃
Soldering time: 5±0.5s

Lead free soldering:
Soldering temperature: 255±5℃
Soldering time: 5±0.5s

At least 90% of surface
area of immersed portion
shall be covered by solder.

8.6

Humidity
test

- (1) Temperature : 60±2℃
(2) relative humidity: 90~95% R.H.
(3) Duration of test: 96h
(4) Take off a drop water
(5) Standard conditions after test: 1h


Contact resistance:
200mΩ Max
Shall meet :
No. 6.2 to 6.4
No. 7.1 to 7.2

8.7	Salt Spray	<p>Apply the following environment to test :</p> <p>(1) Temperature : $35 \pm 5^{\circ}\text{C}$ (2) Salt water density: $5 \pm 1\%$ (3) Duration: 24hours (4) After test, the salt deposit shall be removed by running water.</p>	<p>Appearance: No corrosion spot, no crack, no base plate naked.</p> <p>Contact Resistance: 200 m Ω Max</p>
8.8	Withstand K ₂ S	<p>Apply the following environment to test:</p> <p>(1) Temperature: $35 \pm 5^{\circ}\text{C}$ (2) K₂S Density: 2%; (3) Duration: 2 minute.</p>	<p>Appearance: No corrosion spot, no crack, no base plate naked.</p> <p>Contact Resistance: 200 m Ω Max</p>

9. Recommended PCB Layout

(Top View)



(Single face board T=1.6mm)

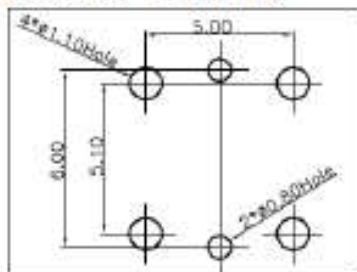

Recommended PCB Layout
(Pattern Side) Tolerance: $\pm 0.05\text{mm}$

9. Packaging

Packaging type: Tray, 1000Pcs/Bag, 10000Pcs/Carton.

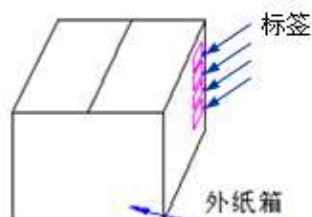

11. Precaution

11.1 Immersion Soldering condition

ITEM	CONDITION
Preheat temperature	110°C Max (Ambient temperature of soldering surface of P.W.B)
Preheat time	60s, Max
Area of flux	1/2 Max of PWB Thickness
Temperature of solder	260±5°C 260±5°C
Time of immersion	5±0.5s 5±0.5s
Number of soldering	2times Max (But should down heat of the first soldering)
Printed wiring board	Single side copper-clad laminates

- (1) After switches were soldered, please be careful not to clean switches with solvent
- (2) Under the condition of using soldering iron, soldering temperature shall be 350°C±5°C with 3±0.5s.

11.2 Notes

- (1) Please be cautious not to give excessive static load or shock to switches.
- (2) Please be careful not to stack up P. W. B. after switches were soldered.
- (3) Preservation under high temperature and high humidity or corrosive gas should be avoided
Especially. When you need to preserve for a long period, do not open the carton.
- (4) The standard storage period is 3 months, with maximum up to 6months, preferably to be used as soon as possible. After opening the package, you should put the remaining switches in a plastic bag to prevent from damp and corrosive gas.
- (5) This Product Specification is considered as the technical agreement on product between the receiving customer and Kailh. Any information on Product Catalogue which is in conflict with or different from the corresponding information of this document is considered as invalid.
- (6) It will be considered that customer already confirmed and accepted this specification if customer issue purchase order to us directly.
- (7) If there is no order or no request for new specification after 1 year upon this specification is issued, the specification will be regarded as invalid.
- (8) Products meet the ROHS & REACH environmental management substances control standards