






成品检验图

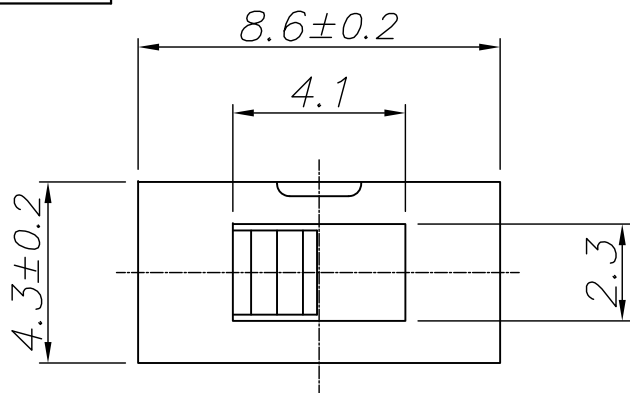

PCB Layout Recommended

Specification :

- 1. Rating : DC12V 100mA
- 2. Contact Resistance : 100mΩ Max
- 3. Insulation Resistance : 50MΩ Min
- 4. Withstand Voltage : AC250V (50-60Hz) for 1 minute
- 5. Operation Force : 250±100gf
- 6. Pre-Travel : 2.00±0.30mm
- 7. Mechanical Life : 10000 Cycles(min)

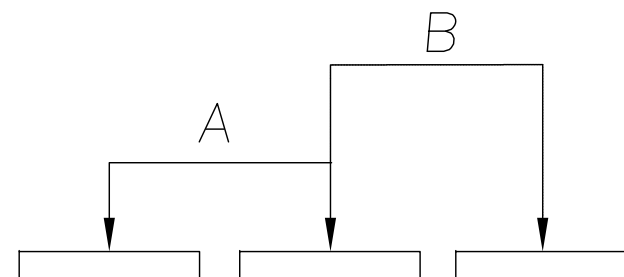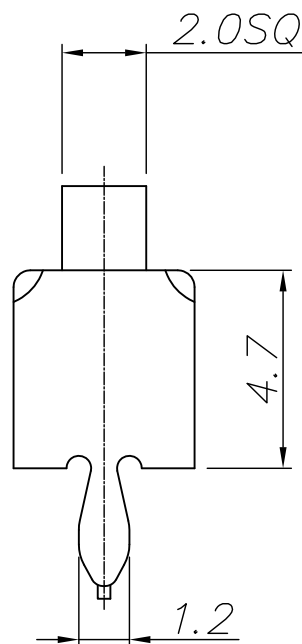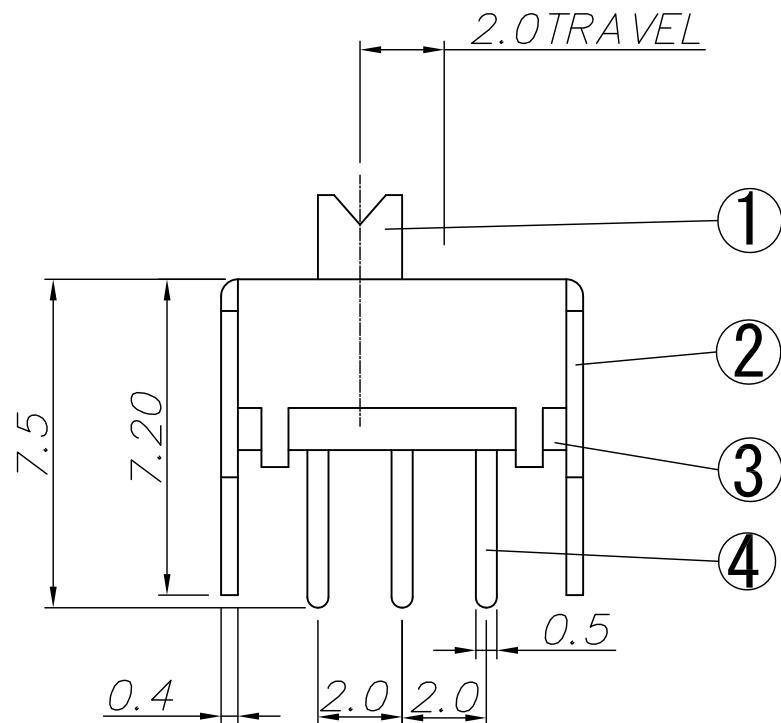


CIRCUIT DIAGRAM

⑤	CONTACT	/	1	C2680	Ag	——	
④	COVER	/	1	SPCC	Ni	——	
③	HANDLE	/	1	POM	Black	——	
②	BASE	/	1	P. C. Board	/	——	
①	TERMINAL	/	3	BRONZE	Ag	——	
ITEM	PART NAME	PART NO.	QTY	MATERIAL	FINISHING	REMARK	
承 认		日期	 Kailh 东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD				
设 计	朱林青	2020.07.06					
审 核			名 称	5 PIN 滑动开关			
核 准			凯华料号	SL864709D01			
未注尺寸公差		30<L	±0.30	角 度	单位: mm	比例: 1:1	视角 
		10<L≤30	±0.20				
		5<L≤10	±0.15				
		L≤5	±0.10				
		±2'	图 号	XXXXXXXXXX	页次 1 OF 1		

工程变更单号	A0	日期	NEW	说明	修 改	审 核	核 准
4							

Product Specification

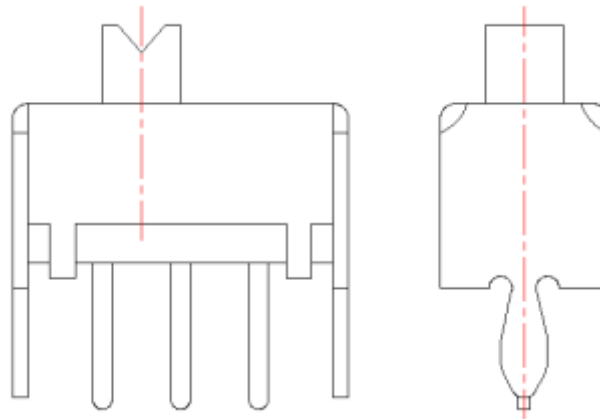

P/N: _____

CSL864709D01

Title :

Slide Switch

Rev.	ECN	Release and Revision Description:	Prepared By /Date:	Checked By/Date:	Approved By/Date:
A	— —	New releasing	HQC 2024. 10. 12	LPH 2024. 10. 12	YP 2024. 10. 12

Content

1. Scope:	3
2. Product Application :	3
3. Technology Parameters:	3
4. Rated Performance Requirements:	3
5. Profile Dimensions:	3
6. Electrical Performance:	4
7. Mechanical Performance:	5
8. Environmental Performance:	7~8
9. Recommended PCB Layout:	8
11. Packaging:	8
12. Precaution:	9

1. Scope:

This Product Specification covers the requirement of Micro switch on product performance, test methods and quality assurance provisions.

2. Product Application:

The Switch is applied in all types of electrical appliances. Please let us know before using any of the products in the application not described abovev.

3. Technology Parameters:

Ambient Humidity:	45~85% R.H.;
Operating Temperature Range:	-10℃~+70℃;
Storage Temperature Range:	-10℃~+70℃;
Suggested storage period :	about 6 months

Normal Condition:

Ambient temperature:	20±5℃
Relative humidity:	25℃~85R.H.;
Air pressure :	86~101KPa;
Contact Resistance:	100 mΩ Max;
Operation Force:	250±100gf
Solder Ability :	Tim-lead soldering : 245℃±5℃ 5s±0.5s;
	Lead-free welding : 255℃±5℃ 5s±0.5s;

Withstand Soldering Temperature:	260±5℃ 5±0.5s;
----------------------------------	----------------


4. Rated Performance Requirements:

Rating:	DC5V / 50mA
Insulation Resistance:	≥100MΩ/DC 250V;
Withstand Voltage:	250V AC 1 Minute;
Mechanical Life:	10,000 Cycles.



5. Profile Dimensions :

See the product drawing

6. Electrical Performance:

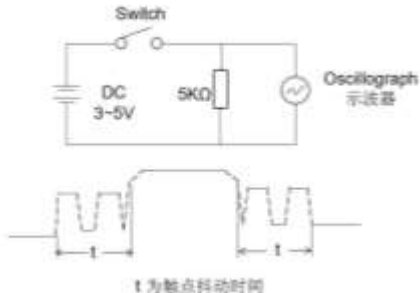Item	Description	Test Condition	Requirement
6.1	Contact Resistance	Static load: (Operation force)x2, which is applied on the center of Switch stem. Be measured when the switch contact stabilization. Measurement tool: Contact resistance Meter. (1KHz, 20mV, 5~50mA) Measured at low current (100mA or less).	100mΩ Max
6.2	Insulation Resistance	Apply a Voltage of DC 250 V for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body.	100MΩ Min
6.3	Dielectric withstanding voltage	Apply a Voltage of AC250 V (50~60Hz) for 1 minute, according to the below method. (1) Between terminals. (2) Between terminal and Body.	No evidence of breakdown.
6.4	Bouncing	Operation speed: 3~4 times/s Oscilloscope Switch Bouncing Test Circuit.  t 为触点抖动时间	Before Life cycle: On: 5ms MAX Off: 5ms MAX After Life cycle: On: 10ms MAX Off: 10ms MAX


7. Mechanical Performance:

It	Description	Test Condition	Requirement
7.1	Operation force	Operate the keystone of the switch and then increase press strength gradually, Measured maximum operation force while the travel of the switch is full.	$250\text{gf} \pm 100\text{gf}$
7.2	Terminal Strength	A static load of 300gf shall be applied to the tip of the terminal for 15 sec in any direction	Electrical characteristics shall be satisfied without damage or excessive looseness of terminals
7.3	Static Strength	A static load of 3kgf shall be applied in the direction of button operation for a period of 60 seconds. 	No damage (Electrical and mechanical)
7.4	Shock	Measured by according to the below condition: (1) Acceleration: 80g accelerated speed (2) Cycles of test: 3 cycles each in 6 directions, for a total of 18 cycles. 	Shall meet No.6, 7.1, 7.2

7.6	Life Test	(1) Applying Force: $250 \pm 50\text{gf}$ (2) Operation speed: 2~3cycles/s (3) Cycles: 10,000 times Min	Contact resistance: $10\ \Omega$ Max Bouncing: 10ms Max Operation force and tactile force: Variation rate within $\pm 30\%$
-----	-----------	---	--


8. Environmental Performance:

Item	Description	Test Con ion	Requirement												
8.1	Cold test	(1) Temperature : - 40±2℃ (2) Duration of test: 96h (3) Take off a drop water (4) Standard conditions after test : 1	Contact resistance: 100m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2												
8.2	Heat test	(1) Temperature : 85±5℃ (2) Duration of test: 96h (3) Take off a drop water (4) Standard conditions after test : 1h	Contact resistance: 100m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2												
8.3	Temperature cycle	(1) Test cycles: 5 cycles (2) Standard condition after test:1h <table><tr><td></td><td>Temperature</td><td>Duration of test</td></tr><tr><td rowspan="4">1 cycle</td><td>20±5℃</td><td>1h</td></tr><tr><td>-40±2℃</td><td>1h</td></tr><tr><td>20±5℃</td><td>1h</td></tr><tr><td>85±5℃</td><td>1h</td></tr></table>		Temperature	Duration of test	1 cycle	20±5℃	1h	-40±2℃	1h	20±5℃	1h	85±5℃	1h	Contact resistance: 100m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2
	Temperature	Duration of test													
1 cycle	20±5℃	1h													
	-40±2℃	1h													
	20±5℃	1h													
	85±5℃	1h													

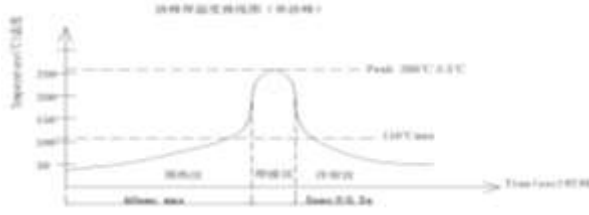8.4	Soldering heat test	Soldering area: 1/2 of PWB thickness. (PWB: T=1.6mm) Soldering temperature: $260 \pm 5^{\circ}\text{C}$ Soldering time: $5 \pm 0.5\text{s}$ 	Appearance: No abnormality.
8.5	Solder ability	Lead-tin soldering: Soldering temperature: $245 \pm 5^{\circ}\text{C}$ Soldering time: $5 \pm 0.5\text{s}$	At least 90% of surface area of immersed portion shall be covered by solder.
8.6	Humidity test	(1) Temperature : $60 \pm 2^{\circ}\text{C}$ (2) relative humidity: 90~95% R.H. (3) Duration of test: 96h (4) Take off a drop water (5) Standard conditions after test: 1h	Contact resistance: 100m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2
8.7	Salt Spray	Apply the following environment to test : (1) Temperature : $35 \pm 5^{\circ}\text{C}$ (2) Salt water density: $5 \pm 1\%$ (3) Duration: 24hours (4) After test, the salt deposit shall be removed by running water.	Appearance: No corrosion spot, no crack, no base plate naked. Contact Resistance: 100 m Ω Max
8.8	Withstand K ₂ S	Apply the following environment to test: (1) Temperature: $35 \pm 5^{\circ}\text{C}$ (2) K₂S Density: 2%; (3) Duration: 2 minute.	Appearance: No corrosion spot, no crack, no base plate naked. Contact Resistance: 200 m Ω Max

9. Recommended PCB Layout


(Top View)
(Single face board T=1.6mm)

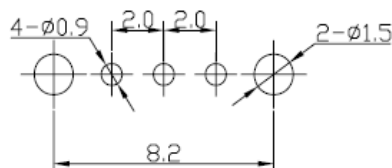

PCB Layout Recommended

10. Packaging

Packaging type: Tape & Reel, 3000Pcs/ Reel, 30000Pcs/ Carton.



11. Precaution

11.1 Immersion Soldering condition

ITEM	CONDITION
Preheat temperature	110℃ Max (Ambient temperature of soldering surface of P.W.B)
Preheat time	60s, Max
Area of flux	1/2 Max of PWB Thickness
Temperature of solder	260±5℃ 260±5℃
Time of immersion	5±0.5s 5±0.5s
Number of soldering	2times Max (But should down heat of the first soldering)
Printed wiring board	Single side copper-clad laminates

- (1) After switches were soldered, please be careful not to clean switches with solvent
- (2) Under the condition of using soldering iron, soldering temperature shall be 350℃±5℃ with 3±0.5s.

11.2 Notes

- (1) Please be cautious not to give excessive static load or shock to switches.
- (2) Please be careful not to stack up P. W. B. after switches were soldered.
- (3) Preservation under high temperature and high humidity or corrosive gas should be avoided
Especially. When you need to preserve for a long period, do not open the carton.
- (4) The standard storage period is 3 months, with maximum up to 6months, preferably to be used as soon as possible. After opening the package, you should put the remaining switches in a plastic bag
to prevent from damp and corrosive gas.
- (5) This Product Specification is considered as the technical agreement on product between the receiving customer and Kailh. Any information on Product Catalogue which is in conflict with or different from the corresponding information of this document is considered as invalid.
- (6) It will be considered that customer already confirmed and accepted this specification if customer issue purchase order to us directly.
- (7) If there is no order or no request for new specification after 1 year upon this specification is issued, the specification will be regarded as invalid.
- (8) Products meet the ROHS & REACH environmental management substances control standards